



Setup Scanfob™ 2002 in HID (keyboard) Batch Mode

First, setup the Scanfob in HID mode to your computer, tablet, or smartphone. Directions and configuration barcodes for this process can be found on the Scanfob Setup Sheet, located on SerialIO.com -> Support -> Scanfob™ 2002 Support -> [Scanfob SPP and HID setup barcodes](#).

Scan the following barcodes from top to bottom, but choose only one timestamp setting.

BEGIN 


Store Data 


Batch Mode 

No Prefix 

No Suffix 

Example of batch data with timestamps

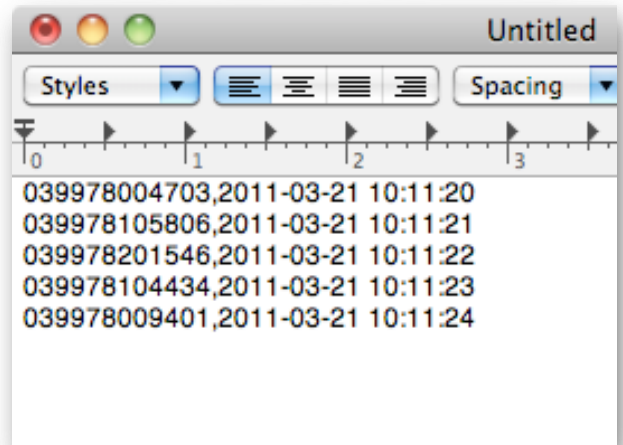

Disable timestamp	
Enable timestamp	



Choose One

END 

Done using the Scanfob in Batch Mode?
Scan the following barcodes:

BEGIN 


Stop Storing Data 

Suffix 

ENTER 

END 

Once the Scanfob™ 2002 has been configured, you may scan barcodes into scanner memory, and then use these barcodes to send and remove the scans.

Send Scanfob™ 2002 data	
Erase Scanfob™ 2002 data	